

NEW

ELIGHT

SB EN ISO 20345 : 2022 SB SR FO PS WPA CI HI E
ASTM F2413-18 M I C EH PR

2022 STANDARD VERSION




1824 BLACK | 35 ▶ 48

COMPOSITION

Upper	Leather
Front reinforcement	Injected PU
Lining	3D Mesh
Toe	Composite
Insole	Mesh over PU foam. Removable. Insulating
Anti-puncture sole	Insulating fabric
Sole	Two-density polyurethane (insulating)
Weight size 42*	625 g *Weight per shoe

Size coefficient 42	front		heel	
	Standard	Parade	Standard	Parade
Ceramic floor / Nals (soap solution)	0,36	0,36	0,31	0,31
SR Ceramic floor + glycerine	0,22	0,22	0,19	0,19

PRODUCT CHARACTERISTICS

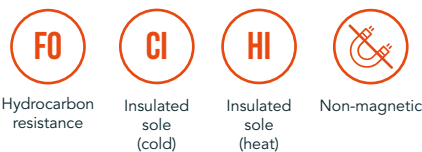

Hydrocarbon resistance

Insulated sole (cold)

Insulated sole (heat)

Non-magnetic

PARADE TECHNOLOGIES



Supports the arch of the foot



Shock-absorbent



Extra-flexible sole



• SHOE WITH INSULATING SOLE PROVIDING PROTECTION FROM RISKS OF ELECTRIC SHOCKS IN DRY ENVIRONMENT

ASTM 2413-18
1000V AC - 1500 V DC

Combinaison de 3 insulating elements

- Vibram® nitrile rubber half sole
- APT insulating sole
- insulating insole

SAFETY TABLE

EN ISO 20345 : 2022 SB SR FO PS WPA CI HI E

	Toe protection (Safety toe cap)
	Slip-resistance** Ceramic flooring + detergent
	Slip-resistance ** (ceramic flooring + oil)
	Hydrocarbon resistance
	Puncture-resistance Non-metallic insert PS = Small spike 3mm
	Sole insulation (cold)
	Sole insulation (heat)
	Energy-absorbing heel
	Water-repellent upper

ASTM F2413-18 M I C EH PR

	Electric insulation in dry environments
--	--